Motorline PROFESSIONAL

CORTINA
Order Form (automatism production)

REV20260525

Client: | Date: / / | Desired supply date: / /

01. INSTALLATION LOCAL

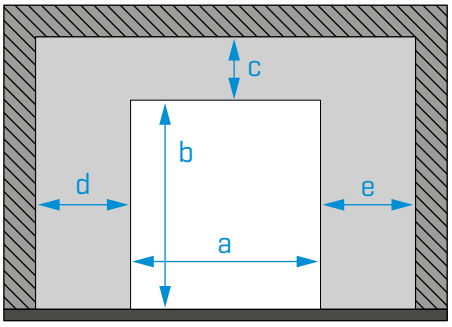

Quantity:

Recommended dimensions (minimum):

Lintel *c*: 200mm
Doorjamb (motor side - *d* ou *e*): 130mm
Doorjamb (Opposite side - *d* ou *e*): 130mm

Local dimensions (mm):

⚠ **Mandatory filling**
follow scheme

a		(Clear passage width)
b		(Clear passage height)
c		(Lintel)
d		(Left lateral)
e		(Right lateral)

02. FABRIC COLOR

(select with a cross the intended option, PVC or fabric, and respective color)

PVC

5010	1003	1015	3002
9016	6026	7040	8017
9005			

Other:

NOTE: Canvas with thickness of 700g / m².

FABRIC

To choose another fabric visit our website:
motorline.pt/en/products/awnings-curtains/fabrics/

Reference:

03. MOTOR POSITION

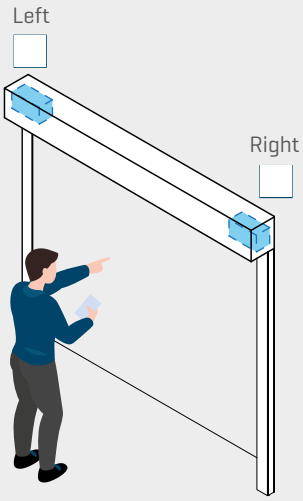

04. STRUCTURE COLOR

STANDARD COLOR - RAL9010 Textured
If you want another colour or finish, please mention here:

05. CORTINA TYPE

☐ Simple Curtain Without Safe Profile

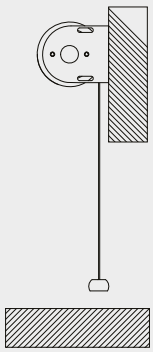

☐ Simple Curtain With Safe Profile

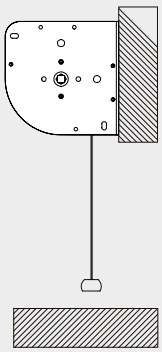

☐ Rail Curtain Without Safe Profile

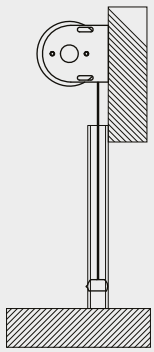

☐ Rail Curtain With Safe Profile

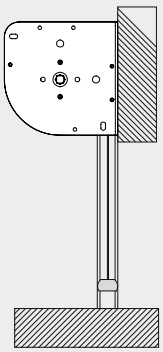

Motorline Electrocelos S.A. • Rua do Sobreiro - Lugar do Pinheiro, 4755-474 Rio Côvo (Santa Eugénia)
NIF 503 612 871 • Tel. 253 830 060 • Fax 253 830 068 • mail@motorline.pt • motorline.pt

06. INSTALLATION OPTIONS

Fixation type:



☐ Wall fixation



☐ Ceiling fixation

Height:



☐ Inside Clear passage (fixing to the ceiling)



☐ Outside Clear passage (fixing to the lintel)

Width:

☐ Inside Clear passage

☐ Outside Clear passage

07. CORTINA TECHNICAL DRAWING

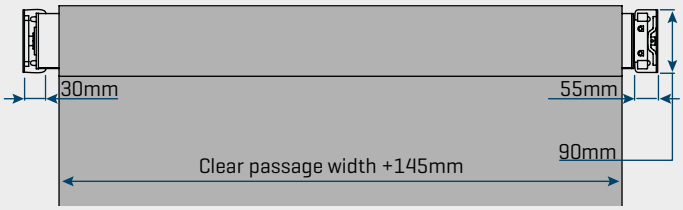

CURTAIN WITHOUT SAFE PROFILE

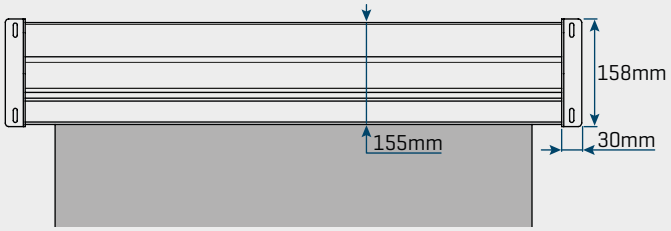

CURTAIN WITH SAFE PROFILE

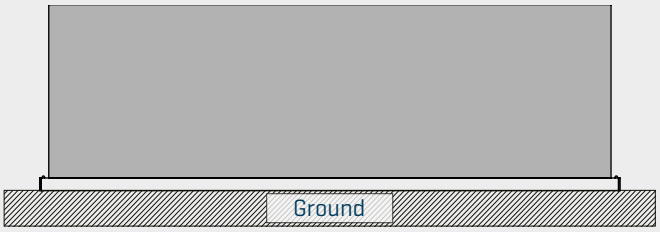

CURTAIN WITHOUT SIDE RAILS

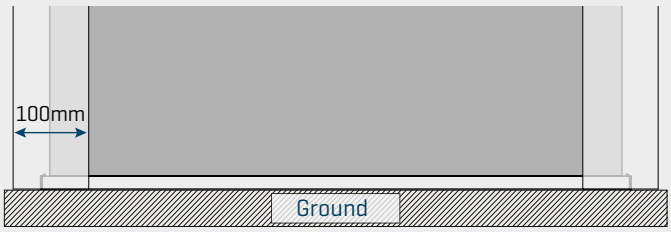

CURTAIN WITH SIDE RAILS

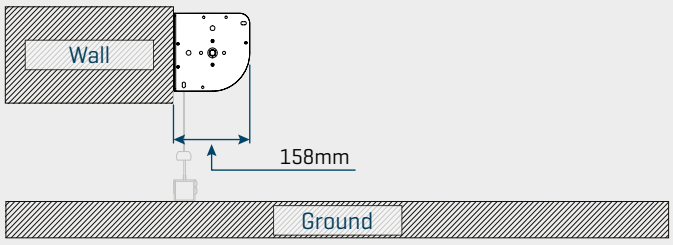

CURTAIN WITHOUT SIDE RAILS



SIDE RAILS THICKNESS

08. OTHER INFORMATION: