


Client:

Date:

Desired supply date:

01. INSTALLATION LOCAL:

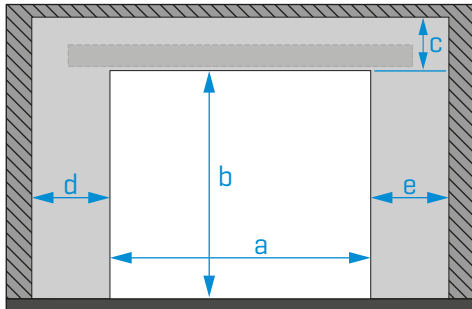

Quantity

Local dimensions [mm]:

! Mandatory filling
← follow scheme

- a [Clear passage width]
- b [Clear passage height]
- c [Lintel]
- d [Left lateral]
- e [Right lateral]

[machine size]

[width of leaf/clamps/frame]
 [height of frame]

02. ADDITIONAL DEVICES:

Complete with X
1, etc. **!**

- M1601 - Radar
- RAP50 - Radar
- MR30 - Radar with photocells
↳ Ceiling fixing plate
- RAP100S - Radar with photocells
- FOT09S1A - Photocells
- MELE01 - Electric lock
- MR10 - Receiver
- FALK - Remote controls
- SINTACT - No touch sensor
- MB17 - No touch sensor

03. FINISHING OF SAFE / FRAME:

SAFE
Textured finishing [standard]:

- Natural anodized
- White powder coating - RAL9003
- Black powder coating - RAL9005

Another workmanship:

Lacquering | RAL color

FRAME OR CLAMP
Textured finishing [standard]:

- Natural anodized
- White powder coating - RAL9003
- Black powder coating - RAL9005

Another workmanship:

Lacquering | RAL color

Other devices/accessories:

04. GLASS

Only available in the model with frames


Tick if you want to order the glass for the door

Mandatory completion of the production form
[available on the following pages] **!**

05. NUMBER OF LEAFS AND ORIENTATION:
[SELECT DESIRED OPTIONS WITH AN X]


1

- 1 mobile leaf
- Open to Left




4

- 1 mobile leaf
- 1 fixed leaf
- Open to Left




2

- 1 mobile leaf
- Open to Right




5

- 1 mobile leaf
- 1 fixed leaf
- Open to Right




3

- 2 mobile leaves



6

- 2 mobile leaves
- 2 fixed leaves



KAPV Anti-Panic - Automatic Sliding Door


06. OPENING TYPE: [SELECT WITH X THE DESIRED OPTION]



1

STANDARD

Anti-panic leaves are turned towards the exterior with the safe installed on the interior side.

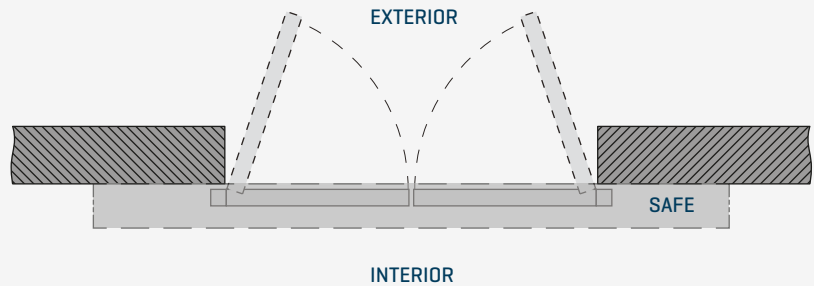


Note: The Anti-Panic system is only present in the mobile leaves, regardless of the existence of fixed leaves.

2

OPPOSITE

Anti-panic leaves are turned towards the exterior with the safe installed on the exterior side also.

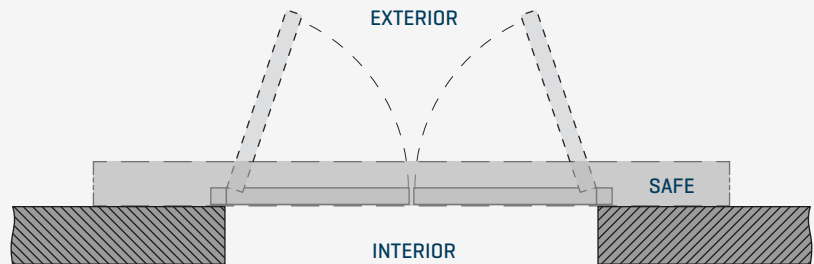


Note: The Anti-Panic system is only present in the mobile leaves, regardless of the existence of fixed leaves.

3

COMPLETE

Mobile and fixed anti-panic leaves are turned towards the exterior with the safe installed on the interior side.

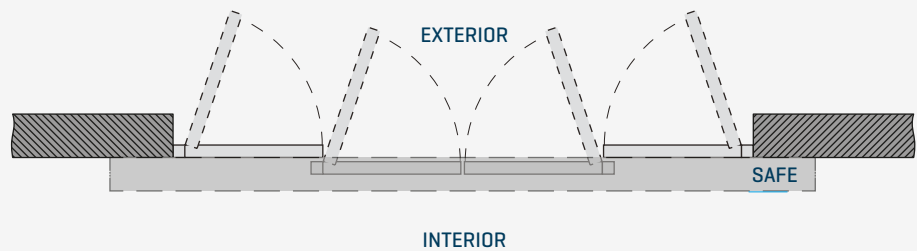

These types of opening are also used when using only 1 mobile leaf, or 1 mobile leaf and 1 fixed leaf.

OBSERVATIONS:


[IN THIS SPACE YOU SHOULD DESCRIBE EVERYTHING YOU FIND RELEVANT TO THE AUTOMATISM PRODUCTION]



07. APPLICATION MODE: [SELECT WITH X THE DESIRED OPTION]




Must only send this sheet if you want the glass leaves to be provided with the automatism.

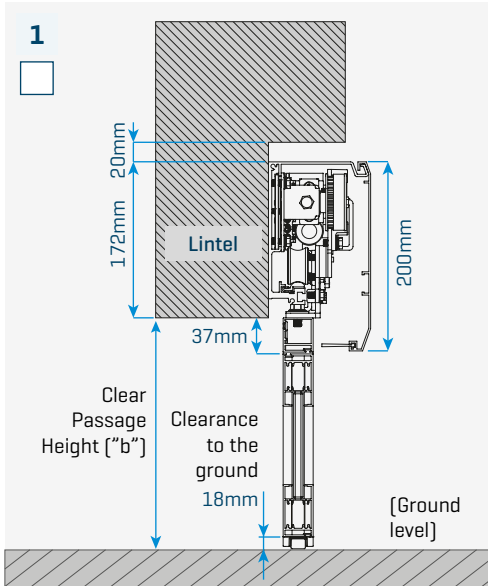

Semi-visible mode

Anti-Panic aluminum profile stays visible from the outside [192mm of minimum lintel].
Height of clear passage reduced in 28mm.

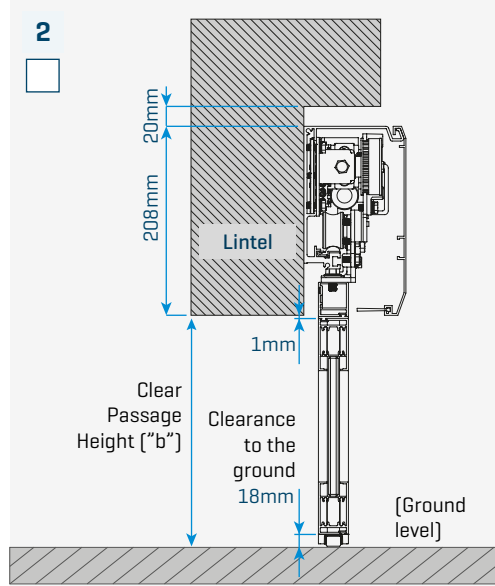

Invisible mode

Anti-Panic aluminum profile stays hidden behind the lintel [228mm of minimum lintel].

Warning: This option can not be used in case of selecting the "complete" opening type [previous page].


GLASS PRODUCTION



GLASS TYPE:

Example:
If you choose the "semi visible-mode" and have a clear passage height of 2000mm then the door leaf height must be 1945mm (2000 - 55).

GLASS DIMENSIONS FOR FRAME WORKMANSHIP

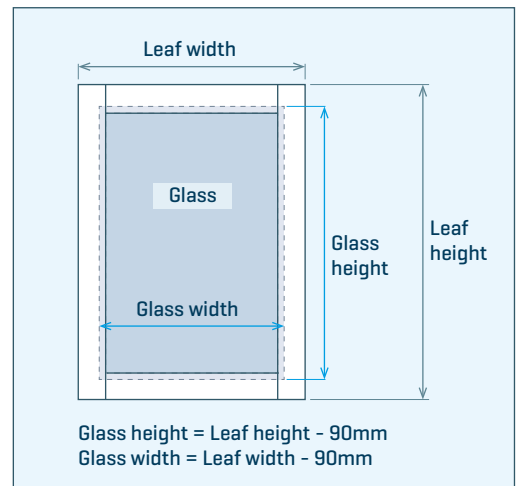

INVISIBLE MODE:

Height Glass Leaf = Clear Passage Height - 55mm

SEMI-VISIBLE MODE:

Height Glass Leaf = Clear Passage Height - 19mm

OBSERVATIONS:

[IN THIS SPACE YOU SHOULD DESCRIBE EVERYTHING YOU FIND RELEVANT TO THE AUTOMATISM PRODUCTION]